


TB825 (Multi Mode)

Compact Product Suite hardware selector

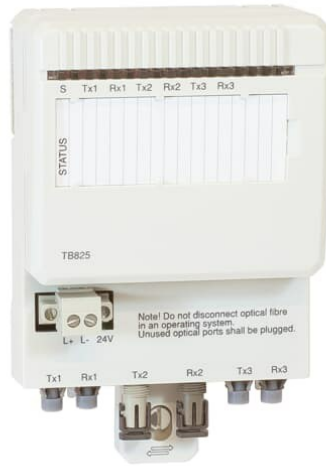

S800 I/O is a comprehensive, distributed and modular process I/O system that communicates with parent controllers and PLCs over industry-standard field buses. The TB825 ModuleBus Optical media converter, converts between plastic opto fiber or HCS fiber with versatile link connectors and glass optical fiber with ST connectors.

The TB825 is built in S800L mechanics and DIN rail mounted. TB825 allows distribution of the optical ModuleBus up to 1000 m per cluster in star configurations.

Features and benefits

- Converts between plastic or HCS optp fiber and glass optical fiber
- DIN rail mounted
- Multi Mode functionality
- S800L mechanics

| General info | |
|----------------------------------|--------------|
| Article number | 3BSE036634R1 |
| Communication protocol | Modulebus |
| Master or slave | Slave |
| Line redundancy | No |
| Module redundancy | No |
| Hot Swap | No |
| Used together with HI Controller | Yes |

| Detailed data | |
|-----------------------|-------|
| 24 V consumption typ. | 96 mA |

Environment and certification

| | |
|-------------------------|---|
| CE-marking | Yes |
| Electrical Safety | EN 61010-1, UL 61010-1, EN 61010-2-201, UL 61010-2-201 |
| Hazardous location | C1 Div 2 cULus, C1 Zone 2 cULus, ATEX Zone 2 |
| Marine certificates | ABS, BV, DNV-GL, LR |
| Temperature, Operating | 0 to +55 °C (+32 to +131 °F), approvals are issued for +5 to +55 °C |
| Temperature, Storage | -40 to +70 °C (-40 to +158 °F) |
| Pollution degree | Degree 2, IEC 60664-1 |
| Corrosion protection | ISA-S71.04: G3 |
| Relative humidity | 5 to 95 %, non-condensing |
| Max ambient temperature | 55 °C (131 °F), for vertical mounting 40 °C (104 °F) |
| Protection class | IP20 according to EN60529, IEC 529 |
| RoHS compliance | DIRECTIVE/2011/65/EU (EN 50581:2012) |
| WEEE compliance | DIRECTIVE/2012/19/EU |

Dimensions

| | |
|--------|-----------------------------------|
| Width | 85.6 mm (3.37 in.) |
| Height | 136 mm (5.35 in.) including latch |
| Depth | 58.5 mm (2.30 in.) |
| Weight | 0.21 kg (0.46 lbs) |

—
solutions.abb/compactproductsuite
solutions.abb/controlsystems

—
We reserve the right to make technical changes to the products or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB does not assume any responsibility for any errors or incomplete information in this document.

We reserve all rights to this document and the items and images it contains. The reproduction, disclosure to third parties or the use of the content of this document – including parts thereof – are prohibited without ABB's prior written permission.

Copyright© 2025 ABB All rights reserved